

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.

SOLO UNIT INSTALLATION INTEGRAL DRIVER (120 / 277V) DIMMING TRIAC/ELV (10%) OR 0-10V (1%)

A- PREPARE THE CEILING WITH ANCHOR SCREWS (SEE ANCHOR DISTANCE ON P.4).


DETAIL 1:

- 1- PASS THE SCREW THROUGH THE THREADED RING AND SECURE THE SCREW INTO THE PLASTIC ANCHOR SCREW.
- 2- PASS THE SUSPENSION CABLE THROUGH THE MOUNTING COUPLING.
- 3- FASTEN THE MOUNTING COUPLING TO THE THREADED RING.

B- FIX THE SUSPENSION CABLE TO THE ALUMINUM EXTRUSION (SEE DETAIL 2 ON P.2).


C- CANOPY INSTALLATION AND JUNCTION BOX WIRING (SEE DETAIL 3 ON P.3).

A + B + C

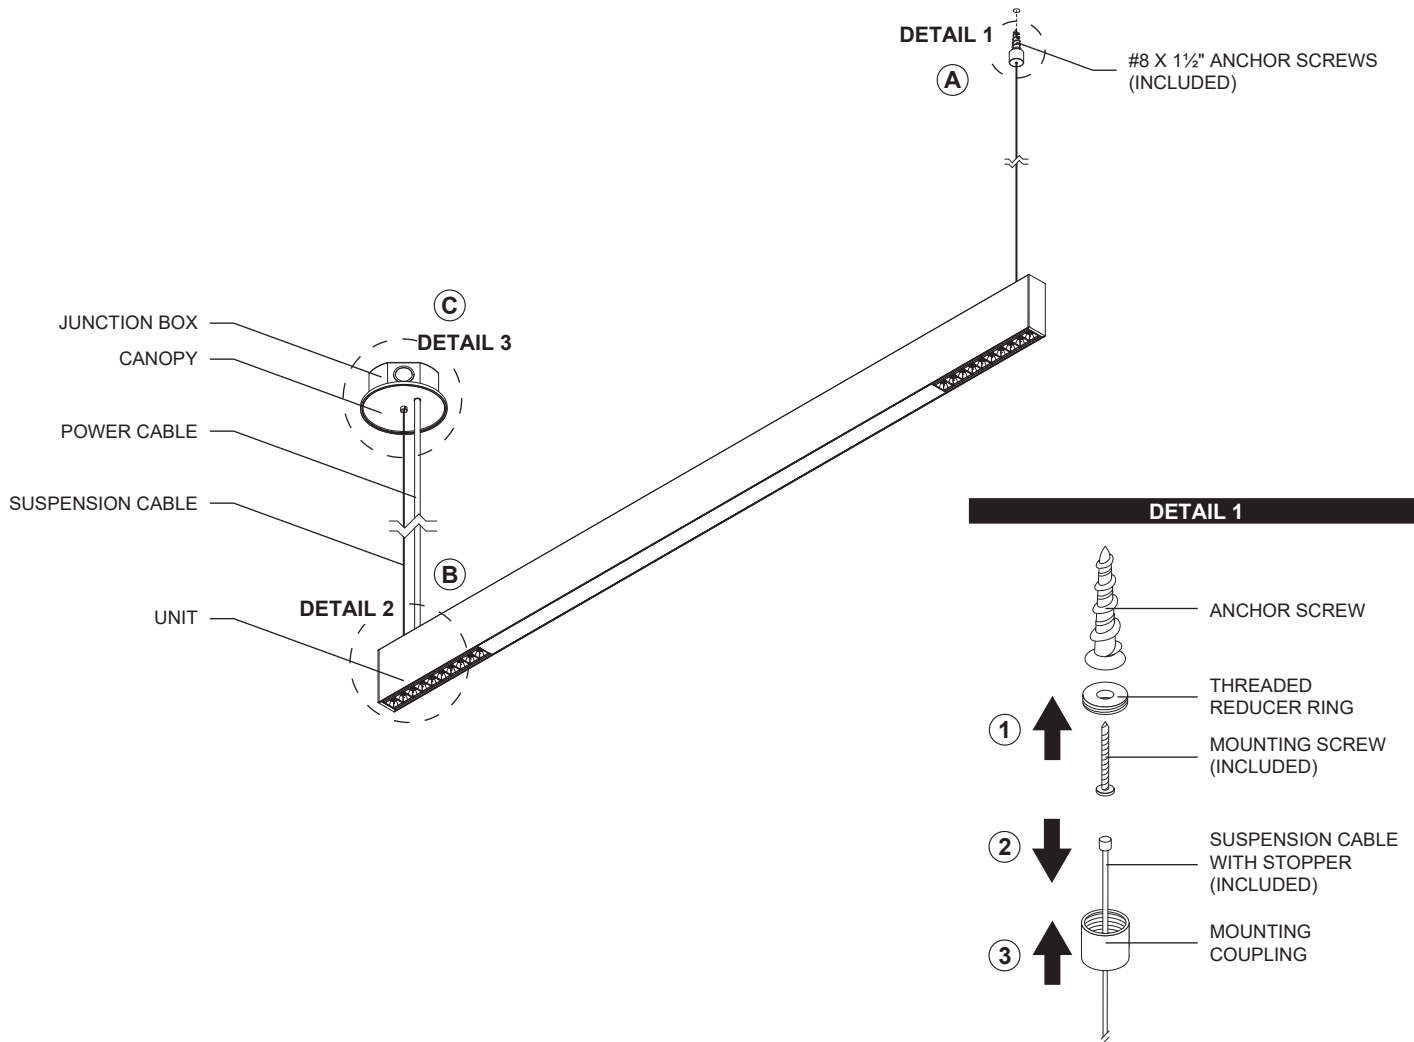


DETAIL 2 - MECHANICAL ASSEMBLY

- A- UNSNAP THE ALUMINUM U-SHAPE COVER.
- B- LIFT THE FIXTURE AND INSERT THE MOUNTING CLIP BY PUSHING IN THE METAL TAB.
ONCE THE MOUNTING CLIP IS INSERTED INTO THE ALUMINUM EXTRUSION, SPIN CLOCKWISE TO SET IT IN PLACE.
- C- FASTEN THE MOUNTING CLIP HEX SET SCREW TO PREVENT THE CLIP FROM SLIDING.
- D- SNAP THE ALUMINUM U-SHAPE COVER BACK ON THE UNIT.

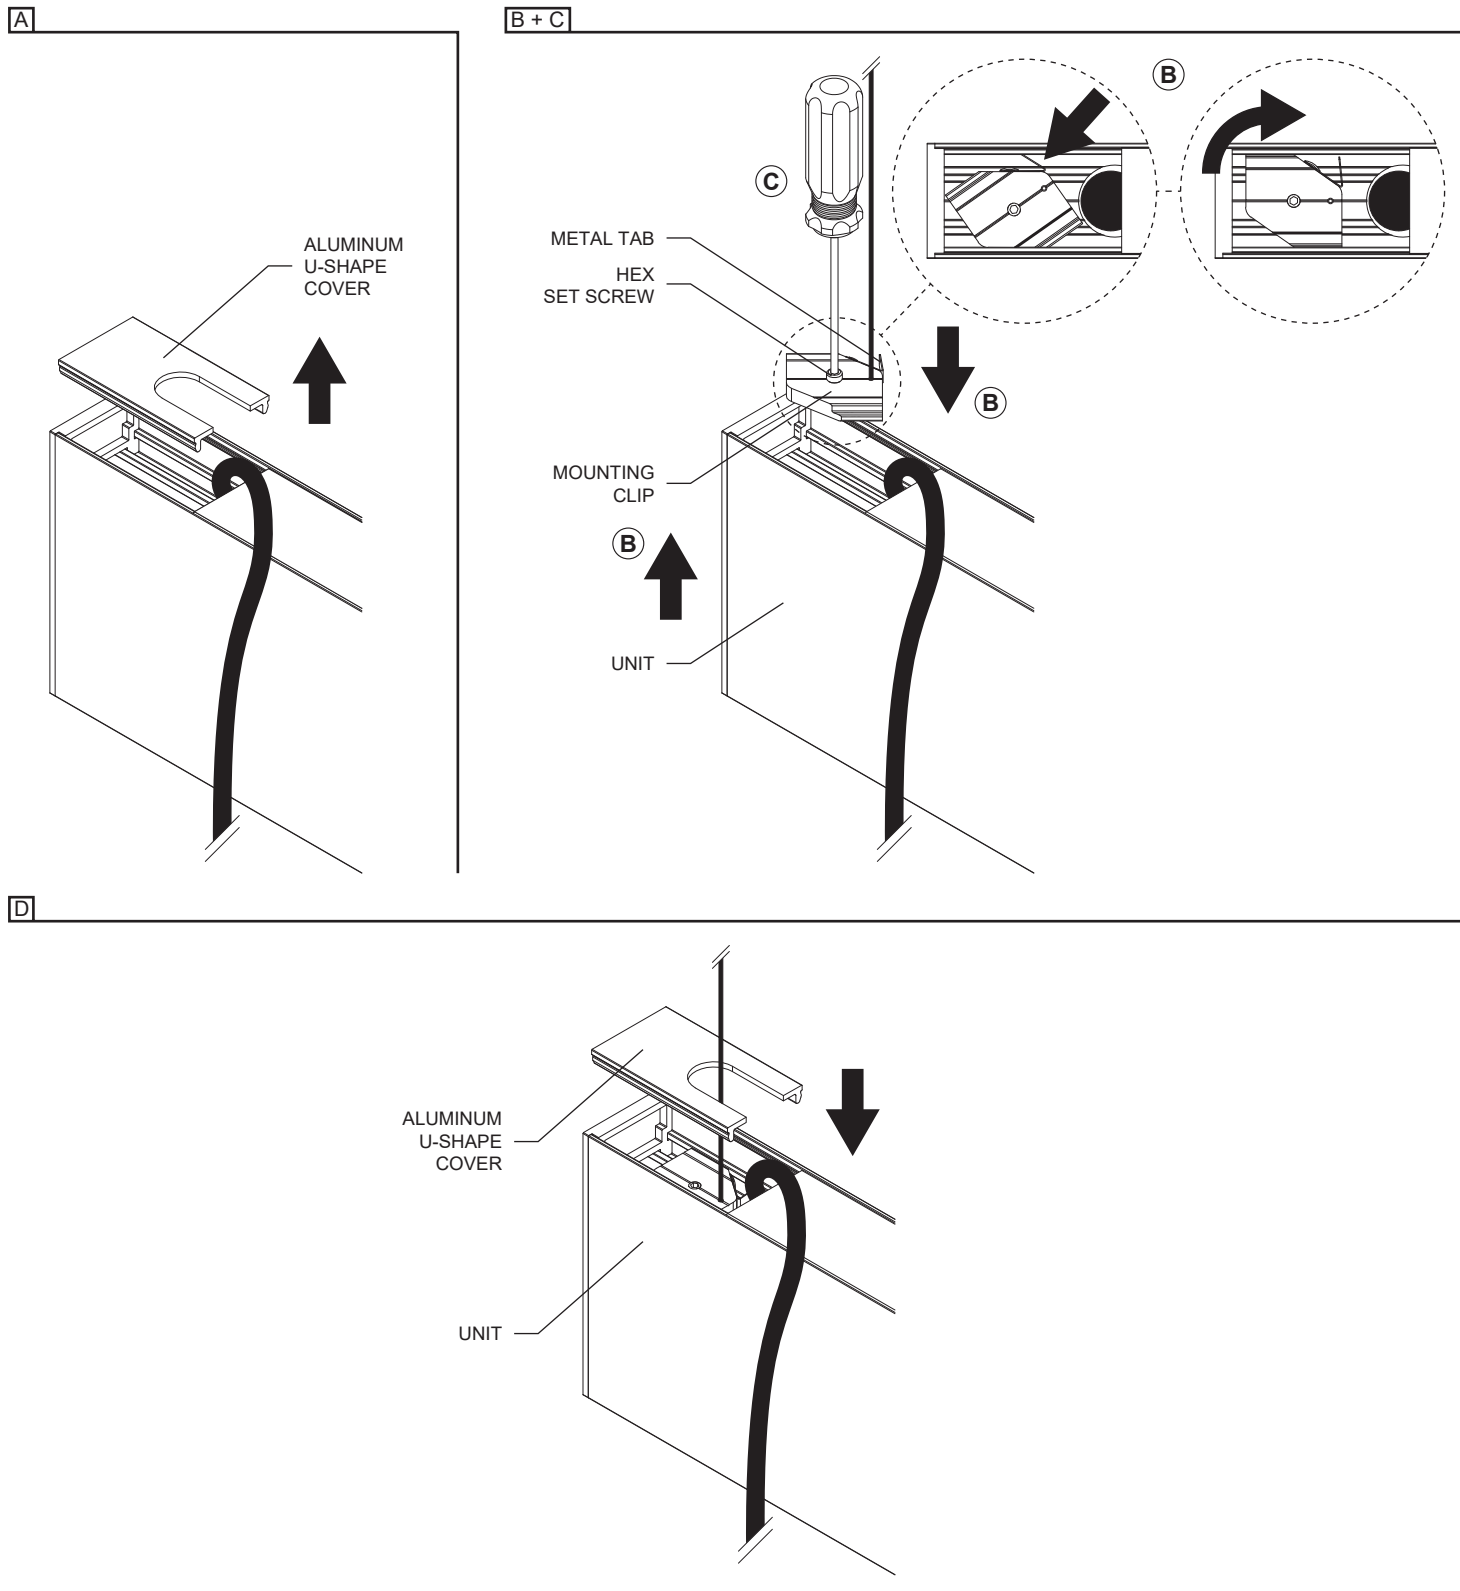


DETAIL 3 - CANOPY INSTALLATION

- A- RUN THE POWER CABLE THROUGH THE CANOPY AND THROUGH THE MOUNTING CROSSBAR HOLE. ADJUST THE CABLE LENGTH AND SECURE IT USING THE CABLE GRIPPER TO LOCK IT'S POSITION AGAINST THE MOUNTING CROSSBAR.
- B- MAKE NECESSARY WIRE CONNECTIONS (**SEE WIRING DIAGRAM**) USING TWIST CONNECTORS (**NOT INCLUDED**).
FOR DIMMING 0-10V: WIRES MUST BE RUN THROUGH A SEPARATE KNOCKOUT HOLE WHEN CONNECTING DIMMING CONTROLLER.
- C- INSTALL MOUNTING CROSSBAR USING (2) PHILLIPS SCREWS (**INCLUDED**).
- D- PASS THUMB SCREW INTO THE MOUNTING CROSSBAR KEY HOLE WITH IT'S LOCK WASHER ON TOP. HOLD SUSPENSION CABLE DOWN IN POSITION AND SECURE WITH THE PROVIDED NUT.
- E- SECURE CANOPY BY SCREWING THE CANOPY'S DECORATIVE NUT ON THE MOUNTING CROSSBAR'S THUMB SCREW.

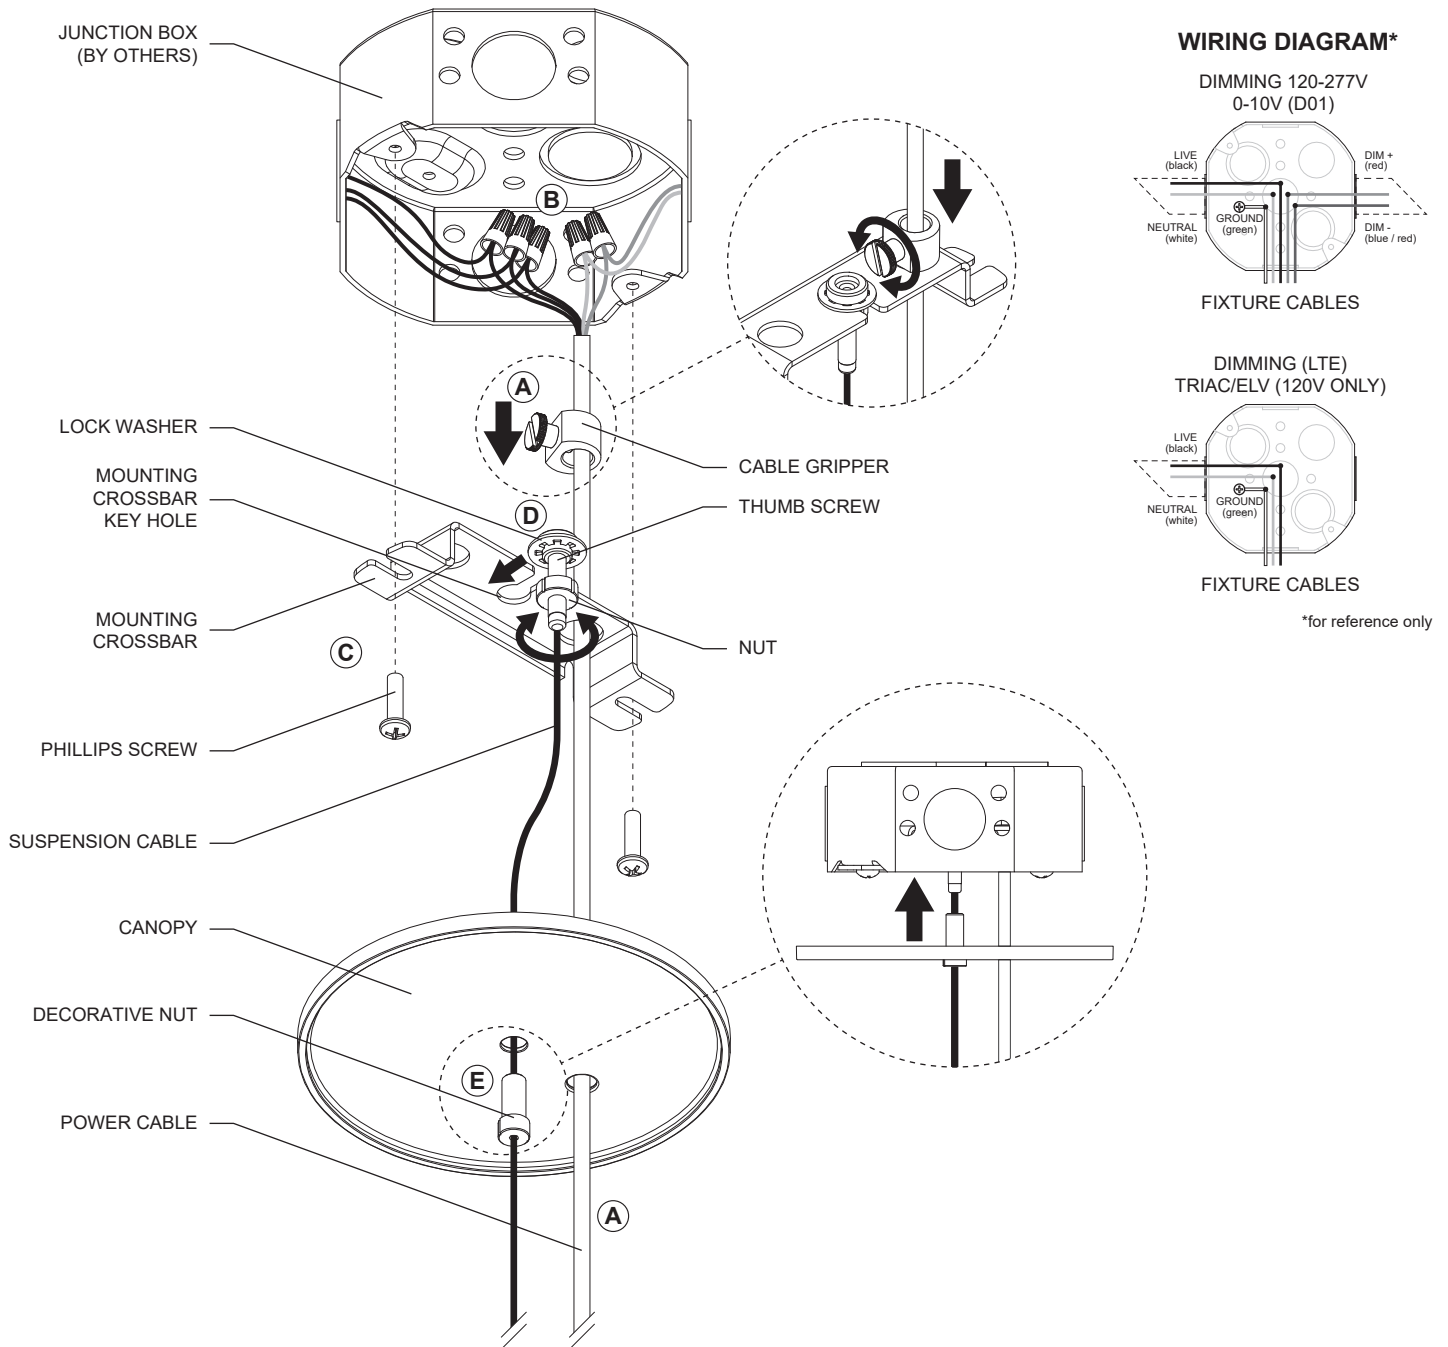


PENDANT ANCHOR POINTS DISTANCE

SOLO 4' UNIT

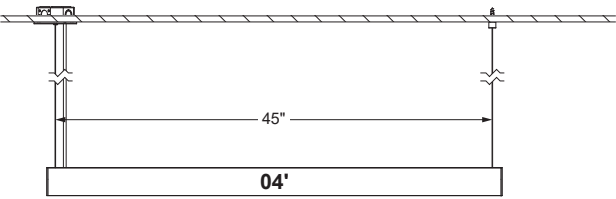

SOLO 8' UNIT

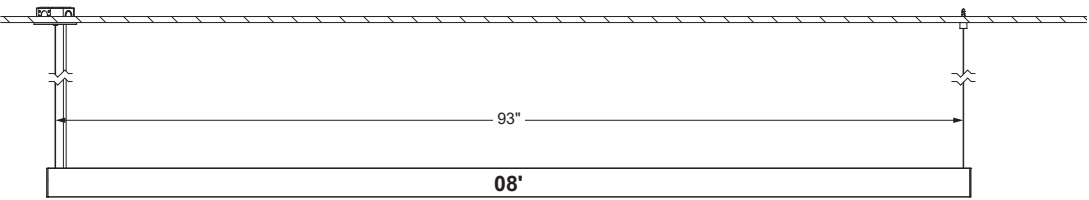

ANCHOR POINTS FOR LINEAR PENDANT ALL CONFIGURATIONS		
Nominal length	Actual length	Anchor distance
04'	4' (1.218m)	3'-9" (1.144m)
08'	7'-11 ¹ / ₈ " (2.435m)	7'-9" (2.362m)